

Eaton 12V 200W battery



Features:


- UL recognized components under UL1989 as well as ISO 9001 and ISO 14001 certified
- Specially designed for high power density and long life applications
- Small volume, lightweight, and high discharge efficiency
- Absorbed glass mat (AGM) design
- Can be used for more than 260 cycles at 100% discharge in cycle service
- Low self-discharge
- Built to comply with IEC 60896, DIN 473534, Eurobat
- Exclusive three year battery parts coverage and one year battery labor coverage (with option to purchase labor coverage for years 2 and 3)

CONSTANT POWER DISCHARGE CHARACTERISTICS: WATTS/CELL (77°F, 25°C)

End voltage (Volts/cell)	Discharge time (minutes) with constant power load (Watts/cell) at 77°F (25°C)									
	5 min	7.5 min	10 min	15 min	20 min	30 min	40 min	50 min	60 min	90 min
1.85 V	264	235	210	172	142	108	88	75	66	49
1.80 V	291	254	227	182	150	114	95	80	70	51
1.75 V	319	275	242	193	158	118	99	83	72	53
1.70 V	347	296	257	201	165	123	101	85	74	54
1.67 V	363	307	265	206	168	125	102	86	74	54
1.60 V	399	329	281	215	175	128	103	86	75	54

All mentioned values are average values per battery per cell.

DIMENSIONS H x W x D in (mm)

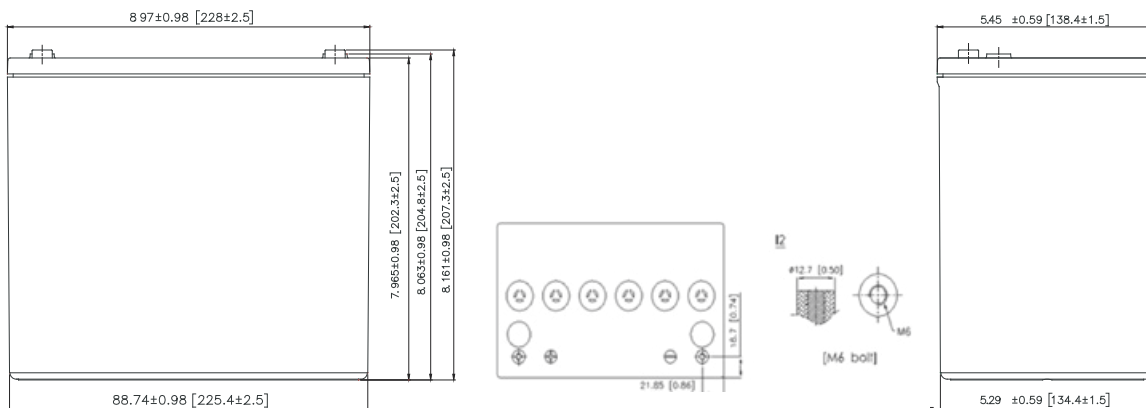

EATON

Powering Business Worldwide

TECHNICAL SPECIFICATIONS

Cells (per battery)	6
Voltage (per battery)	12
Rating	200W @ 15 minute-rate to 1.67V per cell @ 77°F (25°C)
Weight	Approx. 38.15 lb. (17.3 kg)
Lead weight	Approx. 26.64 lb. (12.08 kg)
Maximum discharge current	300 A (5 seconds)
Short circuit current	1509 A
Internal resistance (approximate)	Approx. 5.9 mΩ
*Operating temperature range	Discharge: -15°C to 50°C (5°F to 122°F) Charge: -15°C to 40°C (5°F to 104°F) Storage: -15°C to 40°C (5°F to 104°F)
Float charging voltage	13.5 to 13.8 VDC/unit Average at 77°F (25°C)
Terminal/Tightening torque	12-thread lead alloy recessed terminal to accept M6 bolt/91 lb in (max)
Container material	Polypropylene
Dimensions	Length (L): 228.0 ± 2.5 mm 8.98 ± 0.10 inch Width (W): 138.4 ± 1.5 mm 5.45 ± 0.06 inch Container Height (h): 201.3 ± 2.5 mm 7.93 ± 0.10 inch Overall Height (H): 206.3 ± 2.5 mm 8.12 ± 0.10 inch

* It is recommended to keep the ambient air temperature the battery is used in at 25°C (77°F) for optimal battery life and discharge performance.



For more information, please visit
[Eaton.com/UPSbatteries](https://www.eaton.com/UPSbatteries)

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2019 Eaton
All Rights Reserved
Printed in USA
Pub. No. BAT08FXA / GG
June 2019

Eaton is a registered trademark.

All other trademarks are property of their respective owners.